



VERTICAL SLIDE CLIP
INSTALL PER MFG.
SPECIFICATIONS.

@ JAMB CONDITIONS:
PROVIDE (1) SLIDE CLIP
@ EA. SIDE OF JAMB
(2) V.S.C. PER JAMB

(2) 0.145" ϕ P.D.F.'S
@ EACH SLIDE CLIP
MAINTAIN 1" MIN.
FASTENER SPACING &
1/2" MIN. EDGE DIST.

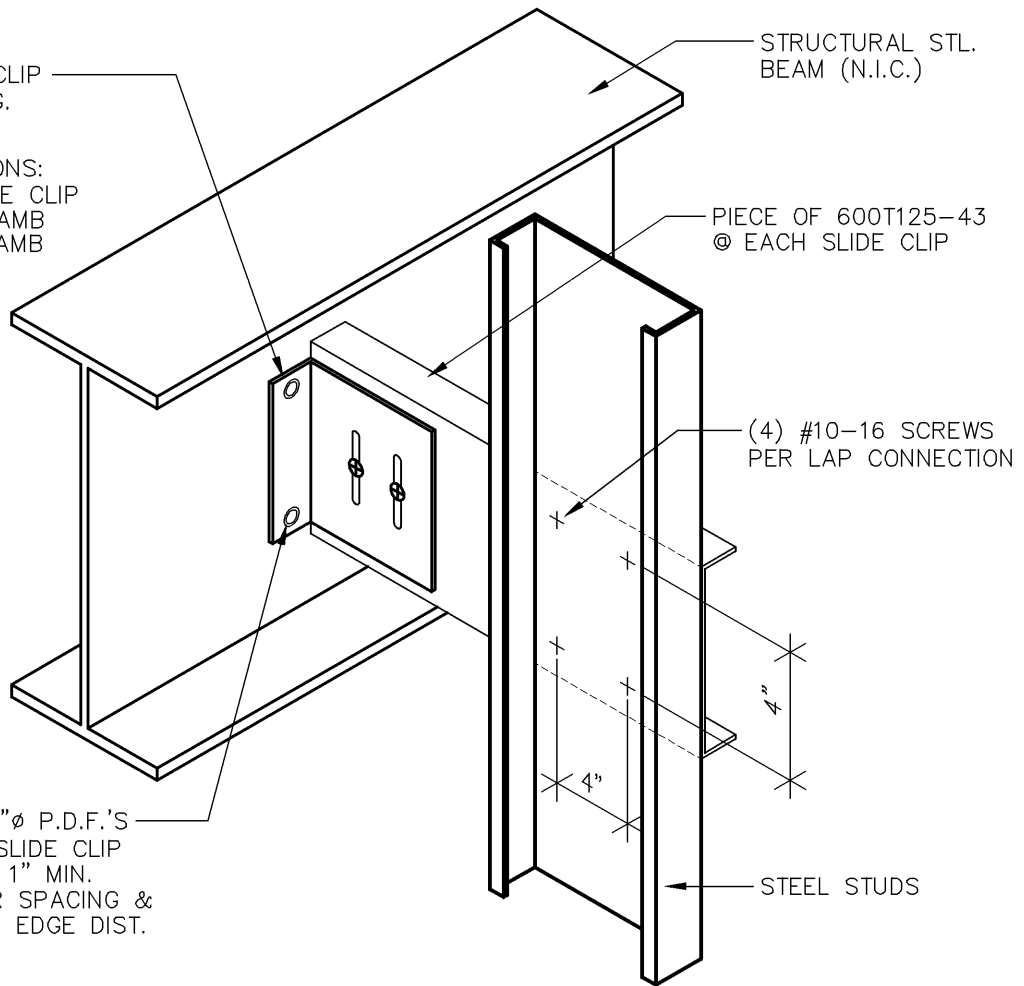

TELLING™



BUILDSTRONG

6272 CENTER STREET
MENTOR, OHIO 44060
PHONE: 440-974-3370

DETAIL IS FOR
REFERENCE ONLY.
NOT FOR CONSTRUCTION.

DETAIL PROVIDED BY:



100 CAMELOT DRIVE
FOND DU LAC, WI 54935
PHONE: (920) 926-9800

EXTENDED VERTICAL SLIDE CLIP DETAIL