

MAXIMUM HOLE SIZE W/O REINFORCING
WALL FRAMING



STUD SIZE	MAX. HOLE DEPTH (A)	MAX. HOLE LENGTH (B)	MIN. HOLE SPACING (C)	MIN. HOLE EDGE DIST. (D)
3 5/8" STUD	1 1/2"	4"	7"	10"
6" STUD	1 1/2"	4"	11"	10"
8" STUD	1 1/2"	4"	16"	10"
10" STUD	1 1/2"	4"	20"	10"
12" STUD	1 1/2"	4"	24"	10"

MAXIMUM HOLE SIZE W/O REINFORCING
JOIST FRAMING



STUD SIZE	MAX. HOLE DEPTH (A)	MAX. HOLE LENGTH (B)	MIN. HOLE SPACING (C)	MIN. HOLE EDGE DIST. (D)
6" STUD (20, 18, 16, 14, 12 GA.)	1 1/2"	4"	7"	10"
8" STUD (18, 16 14, 12 GA.)	1 1/2"	4"	11"	10"
10" STUD (16, 14 12 GA.)	1 1/2"	4"	16"	10"
12" STUD (16 GA.)	1 1/2"	4"	20"	10"
12" STUD (14 & 12 GA.)	1 1/2"	4"	24"	10"

MAXIMUM HOLE SIZE W/ REINFORCING

STUD SIZE	MAX. HOLE DEPTH (A)	MAX. HOLE LENGTH (B)	MIN. HOLE SPACING (C)	MIN. HOLE EDGE DIST. (D)
3 5/8" STUD	1 3/4"	6"	16"	10"
6" STUD	3"	6"	16"	10"
8" STUD	4"	8"	24"	10"
10" STUD	5"	10"	24"	10"
12" STUD	6"	12"	24"	10"

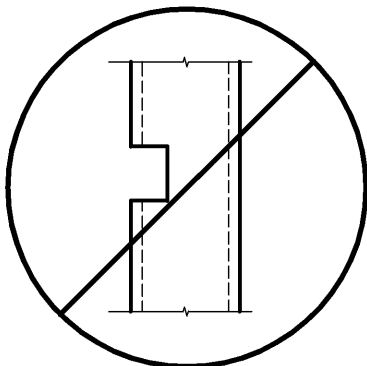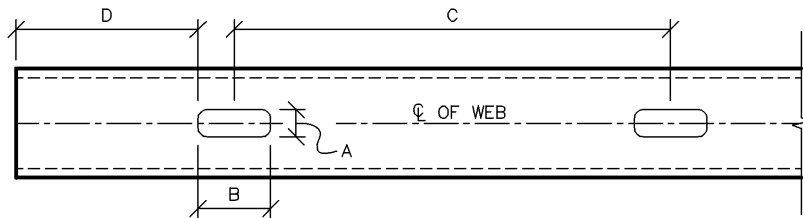

**DO NOT NOTCH
STEEL STUDS**

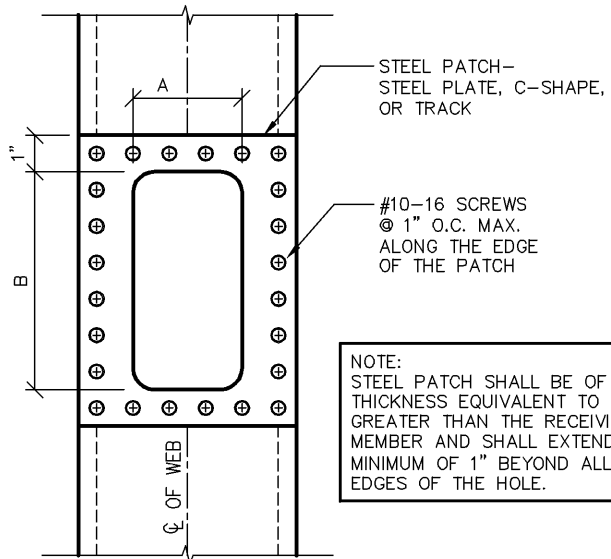

BUILDSTRONG
6272 CENTER STREET
MENTOR, OHIO 44060
PHONE: 440-974-3370

DETAIL IS FOR
REFERENCE ONLY.
NOT FOR CONSTRUCTION.

DETAIL PROVIDED BY:



100 CAMELOT DRIVE
FOND DU LAC, WI 54935
PHONE: (920) 926-9800

STUD HOLE PENETRATION